




Deep Groove Ball Bearings

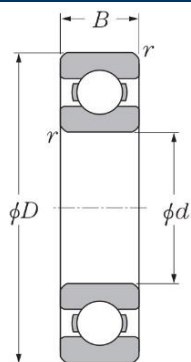


Open type




Shielded type (ZZ)



Contact sealed type (2RS)



With snap ring groove



With snap ring

d 10~22mm

Boundary dimensions			Basic load ratings				Limiting speeds		Bearing numbers					Mass	
mm			dynamic		static		min ⁻¹		open type	shielded type	sealed type	BRAND	snap ring	kg	
d	D	B	$r_{s\ min}$	C_r	C_{or}	C_r	C_{or}	grease							oil
10	19	5	0.3	1.830	0.925	187	94	32 000	38 000	6800	ZZ	2RS	UGTEC	—	0.005
	22	6	0.3	2.700	1.270	275	129	30 000	36 000	6900	ZZ	2RS	UGTEC	—	0.009
	26	8	0.3	4.550	1.960	465	200	29 000	34 000	6000	ZZ	2RS	UGTEC	—	0.019
	30	9	0.6	5.100	2.390	520	244	25 000	30 000	6200	ZZ	2RS	UGTEC	—	0.032
	35	11	0.6	8.200	3.500	835	355	23 000	27 000	6300	ZZ	2RS	UGTEC	—	0.053
12	21	5	0.3	1.920	1.040	195	106	29 000	35 000	6801	ZZ	2RS	UGTEC	—	0.006
	24	6	0.3	2.890	1.460	295	149	27 000	32 000	6901	ZZ	2RS	UGTEC	—	0.011
	28	8	0.3	5.100	2.390	520	244	26 000	30 000	6001	ZZ	2RS	UGTEC	—	0.021
	32	10	0.6	6.100	2.750	620	280	22 000	26 000	6201	ZZ	2RS	UGTEC	NR	0.037
	37	12	1.0	9.700	4.200	990	425	20 000	24 000	6301	ZZ	2RS	UGTEC	—	0.060
15	24	5	0.3	2.080	1.260	212	128	26 000	31 000	6802	ZZ	2RS	UGTEC	—	0.007
	28	7	0.3	3.650	2.000	375	204	24 000	28 000	6902	ZZ	2RS	UGTEC	—	0.016
	32	9	0.3	5.600	2.830	570	289	22 000	26 000	6002	ZZ	2RS	UGTEC	—	0.030
	35	11	0.6	7.750	3.600	790	365	19 000	23 000	6202	ZZ	2RS	UGTEC	—	0.045
	42	13	1.0	11.400	5.450	1 170	555	17 000	21 000	6302	ZZ	2RS	UGTEC	—	0.082
17	26	5	0.3	2.230	1.460	227	149	24 000	28 000	6803	ZZ	2RS	UGTEC	—	0.008
	30	7	0.3	4.650	2.580	475	263	22 000	26 000	6903	ZZ	2RS	UGTEC	—	0.018
	35	8	0.3	6.800	3.350	695	345	20 000	24 000	16003	—	—	UGTEC	—	0.032
	35	10	0.3	6.800	3.350	695	345	20 000	24 000	6003	ZZ	2RS	UGTEC	—	0.039
	40	12	0.6	9.600	4.600	980	465	18 000	21 000	6203	ZZ	2RS	UGTEC	—	0.066
	47	14	1.0	13.500	6.550	1 380	665	16 000	19 000	6303	ZZ	2RS	UGTEC	—	0.115
20	62	17	1.1	22.700	10.800	2 320	1 100	14 000	16 000	6403	ZZ	2RS	UGTEC	—	0.270
	32	7	0.3	4.000	2.470	410	252	21 000	25 000	6804	ZZ	2RS	UGTEC	—	0.019
	37	9	0.3	6.400	3.700	650	375	19 000	23 000	6904	ZZ	2RS	UGTEC	—	0.036
	42	8	0.3	7.900	4.500	810	455	18 000	21 000	16004	—	—	UGTEC	—	0.051
	42	12	0.6	9.400	5.050	955	515	18 000	21 000	6004	ZZ	2RS	UGTEC	—	0.069
	47	14	1.0	12.800	6.650	1 310	680	16 000	18 000	6204	ZZ	2RS	UGTEC	NR	0.106
	52	15	1.1	15.900	7.900	1 620	805	14 000	17 000	6304	ZZ	2RS	UGTEC	NR	0.144
22	72	19	1.1	28.500	13.900	2 900	1 420	12 000	14 000	6404	—	—	UGTEC	—	0.400
	44	12	0.6	9.400	5.050	955	515	17 000	20 000	60/22	ZZ	2RS	UGTEC	—	0.074
	50	14	1.0	12.900	6.800	1 320	690	14 000	17 000	62/22	ZZ	2RS	UGTEC	—	0.117
	56	16	1.1	18.400	9.250	1 880	945	13 000	15 000	63/22	ZZ	2RS	UGTEC	—	0.176